

Features


- Applies to American, Canadian and German applications.

Applications


- Suppressing noise occuring Automatic machines and Office appliances.



Safety Agency	Standard	File No.
UL	:UL60384-14	E47474 (Except XAB1202)
cUL	:CSA E60384-14	E47474 (Except XAB1202)
CSA	:C22.2 No.1	LR37404, LR68886 (Except XAB1202)
VDE	:IEC/EN 60384-14	128473 (Except XAV series)

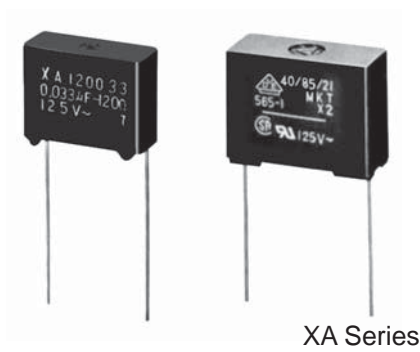


XA Series

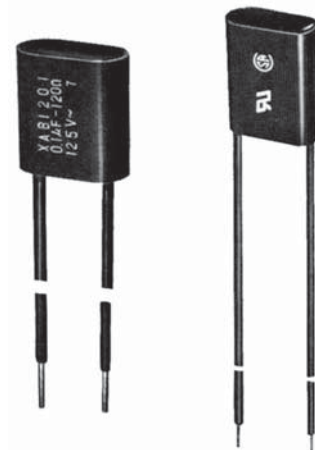


XAB Series

Dimensions

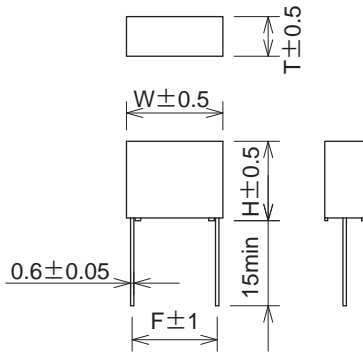

Circuit

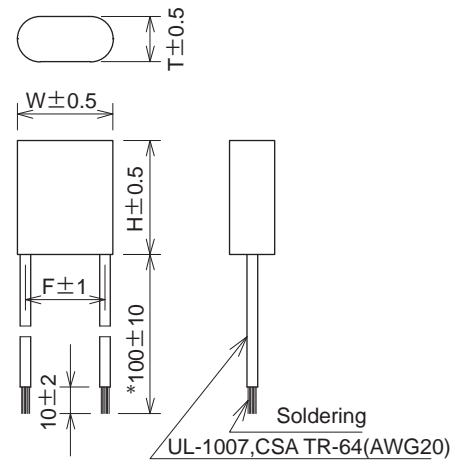

*200 & 300 available

Unit: mm

Electrical Specifications

Rated Voltage **125Vac(UL, CSA), 250Vac(VDE)**

Safety Agency	Class	Model Number	Capacitance $\mu\text{F} \pm 20\%$	Resistance $\Omega \pm 30\%$	Dimension				Pulse condition (Max.)				Peak Pulse Voltage	Test Voltage	Insulation Resistance
					W	H	T	F	Peak to peak	Pulse width Max.	Repetitive frequency	Pulse width (sec) x Frequency (Hz)			
	X 2	XA120033	0.033	120(1/4W)	17.0	14.0	7.0	15.0	700V max	20msec.	120(60)Hzmax	3(0.8)max	700V	Line to Line 1200Vrms 50/60Hz 2~5sec	Line to Line 15,000M Ω min
		XA1201	0.1		20.0	16.5	17.5								
		XAB1201	0.1	120(1/2W)	18.0	21.5	8.5	15.0	max	50msec.	120Hz max	3max	700V	Line to Case 2000Vrms 50/60Hz 60sec	Line to Case 100,000M Ω min (at 500Vdc)
		XAB1202	0.2		19.0	23.0									

Operating Temperature: -40~+85°C